


FEATURES:

A compact over-all design on large 10" wheels provides for easy maneuvering. The large 3-bag hopper is equipped with two slow moving 9" diameter feed screws. The material that is dumped into the hopper will not bridge. It also receives lowest possible agitation for best yield and material integrity. A heavy steel disk tooled with special tungsten carbide pins comb material for controlled agitation for different materials and applications. The airlock chamber is plated with industrial hard-chrome for extra long life. Feed screw speed determines the feed volume. It can be remotely controlled with a special dial station. A positive air displacement blower pushes material pneumatically to the spray nozzle at the end of the hose. It is protected by a checkvalve and is equipped with a bleed-off valve and a pressure gauge. The BOSS has served the fireproofing industry for many years with the best record of performance and lowest maintenance requirements, which is expressed with the 18-month warranty.

SPECIFICATIONS:

DIMENSIONS	28"(71cm) wide; 56"(142cm) long; 45"(114cm) high
LOADING LEVEL	40.5"(103cm)
WEIGHT	789lbs(359kg)
FEED MOTOR	1HP to 2HP
BLOWER MOTOR	3HP AC single phase or three phase
POWER REQUIREMENT	208/230VAC, 25 AMP.
BLOWER	Roots URAI 36
FEEDER OUTLET	3"
REMOTE FEED CONTROL	Infinitely variable or ON/OFF

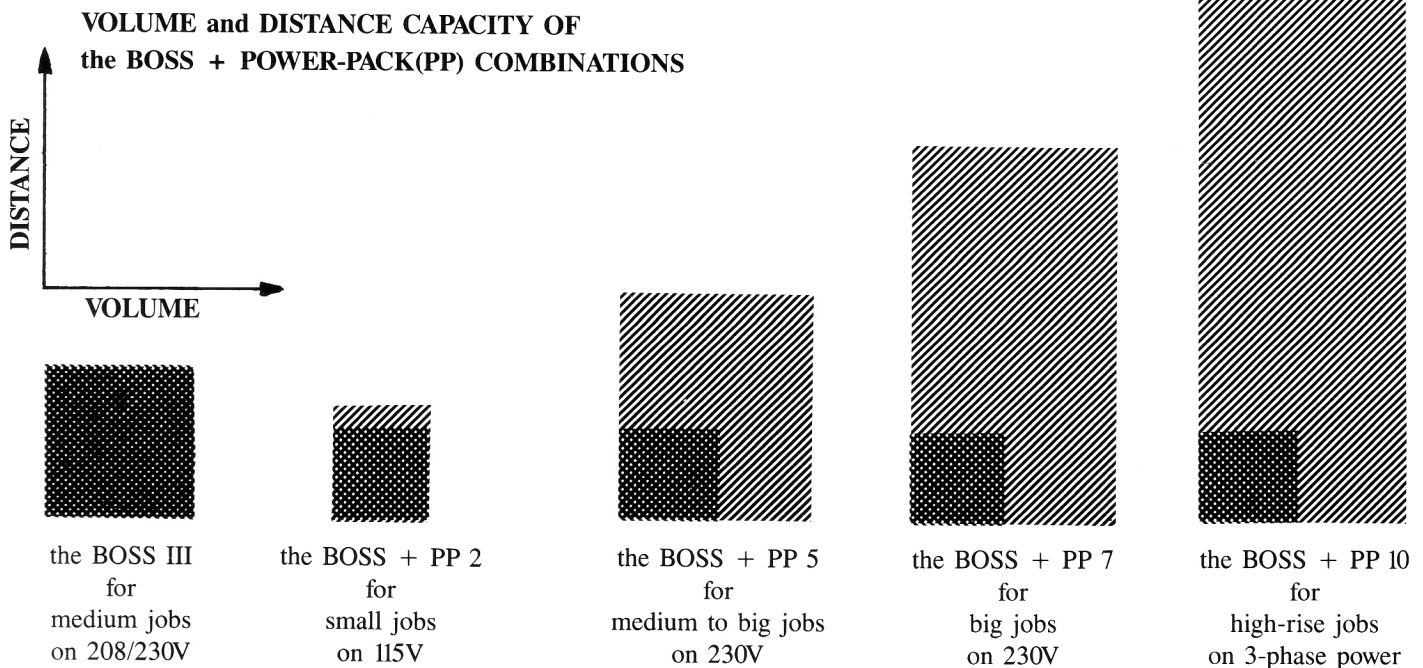

CONTRACTOR'S CONSULTING SERVICE, INC.

1024 4th Avenue South, Nashville, TN 37210 • (615) 255-6958 • (800) 521-2677

Contractor's Consulting Service, Inc. reserves the right to change specifications without notice.