


THE BOSS

WATER BOOSTER PUMP


This Booster Pump controls proper water volume at the spray nozzle effortlessly. The ready-to-use pumping system has all required components mounted on either a 55 or 30 Gal. drum lid and includes motor and electric cable w. plug, pump, pressure control, gauge, inlet floatvalve, suction line and strainer, bypass line, and discharge fitting.

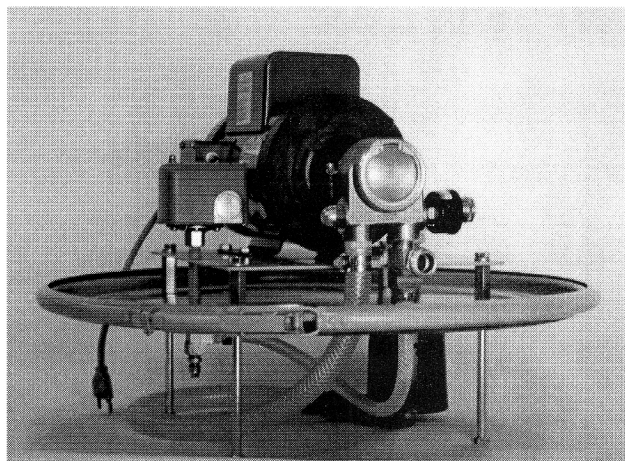

FIVE EASY STEPS PUT THIS PUMP IN OPERATION

1. Set Pump Assembly on open-top drum (55 or 30 Gal) and secure with lock ring.
2. Attach discharge hose to male garden hose fitting at pump, and open valve at nozzle.
3. Attach water supply to female swivel garden hose coupling and fill drum with water. Note: There will be a short delay in shut-off the first time the inlet float valve is used while the control chamber fills with water.
4. Connect to 110Volt 15Amp. grounded electric power.
5. Depress switch at motor until pressure is maintained.

This compact system has its own stands for easy storage, weighs only 60 lbs. and is normally shipped via UPS.

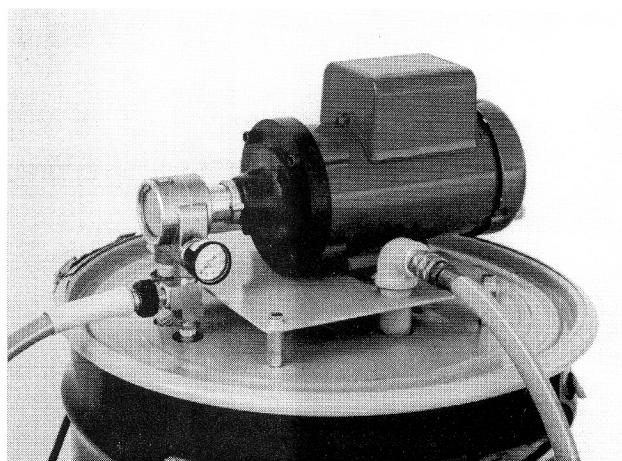

The BOSS Water Booster system is self priming proving water level in drum is up. It will automatically shut down if

- A Water level in drum is too low
- B. There is sudden high discharge volume (I.e. ruptured hose)

Maintenance:

Clean screens as needed,

- A. at by-pass jet; remove jet and flush screen
- B at inlet float valve and intake strainer.

DO NOT OPERATE BELOW FREEZING !!

For price and availability please call (800) 521-2677